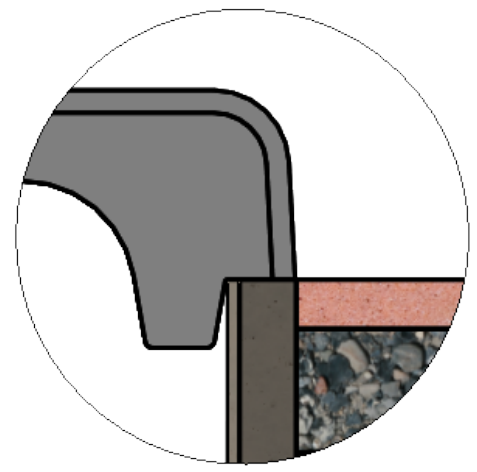




Jusqu'en en haut des cavités d'ancrage  
≥ 10 cm

A (1 : 2)



Il incombe au client de s'assurer que la suggestion de pose est compatible avec la nature du sol.

001	First revision			
index:	modification:			
technical reference:		general tolerance:	surface:	weight: 262.4 kg
<div><div>ACO S.A.S "LE QUAI A BOIS" - BP85 27940 NOTRE DAME DE L'ISLE Tel: 0232513055 www.aco.com</div></div>		basic material:		document type: production drw.
		created by:	reviewed by:	projection: ISO-E 
title: ACO sport Installation drawing ACO sport Channel N125 with one side raised for impermeable synthetic coating Plan d'implantation caniveau ACO sport N125 à bord sur l'élevé pour revêtement synthétique imperméable				
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. Observe copyright by ISO 16016			drawing-no.: 1392241	index: 001
			release date:	sheet: 1/1